





FlexScan[®]
Business Enterprise Monitor Solutions

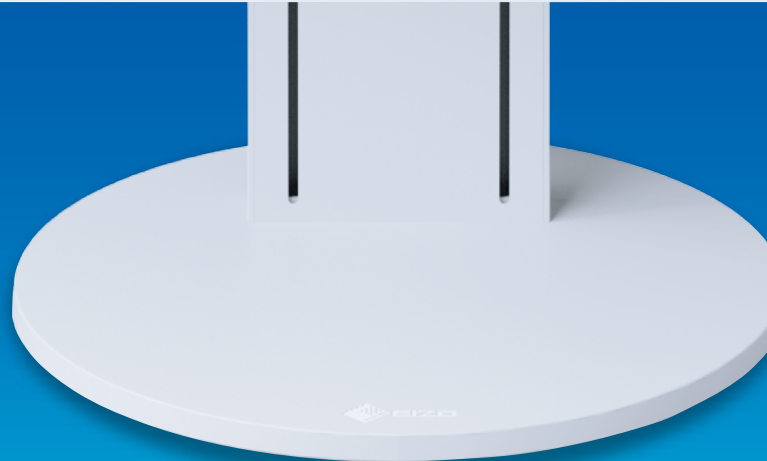

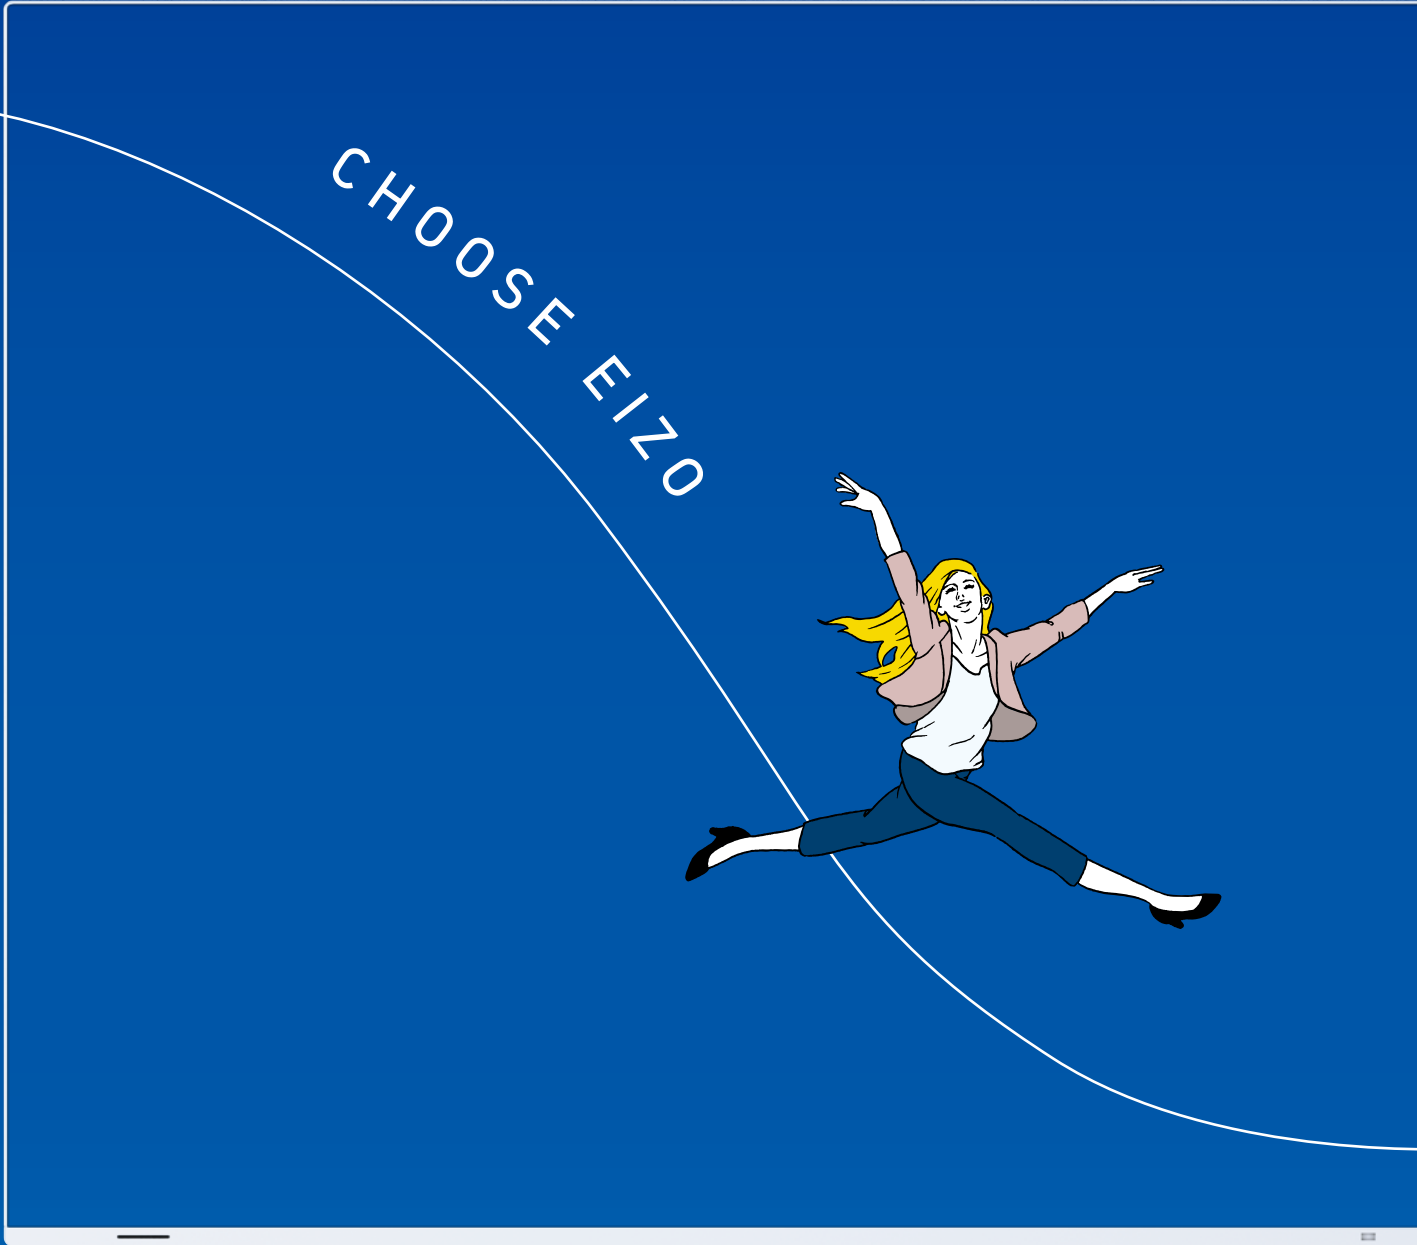

CHOOSE EIZO WORK BETTER



See your trades, not your monitors with a frameless design.



Connect your notebook PC to a monitor and watch your efficiency soar.










Get more CAD work done with a dual-monitor layout.







Share a large screen for smoother communication.

Frameless






	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
NEW EV2785  ■ Black □ White	27"	3840 × 2160	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort 1.2 HDMI × 2	USB Type-C (2 m) DisplayPort (2 m) HDMI (2 m)
EV2780  ■ Black □ White	27"	2560 × 1440	IPS	178°/178°	350 cd/m ²	5 ms	USB Type-C DisplayPort HDMI	USB Type-C (2 m) HDMI (2 m)
EV2750  ■ Black □ White	27"	2560 × 1440	IPS	178°/178°	350 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI	Dual link DVI-D (2 m) DisplayPort (2 m)

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2456  ■ Black □ White	24.1"	1920 × 1200	IPS	178°/178°	350 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)
EV2455  ■ Black ■ Gray □ White	24.1"	1920 × 1200	IPS	178°/178°	300 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)
EV2451  ■ Black □ White	23.8"	1920 × 1080	IPS	178°/178°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DVI-D (2 m) DisplayPort (2 m)
EV2450  ■ Black ■ Gray □ White	23.8"	1920 × 1080	IPS	178°/178°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort HDMI D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)

Wide

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV3237  ■ Black ■ Gray	31.5"	3840 × 2160	IPS	178°/178°	300 cd/m ²	5 ms	DVI-D 24 pin DisplayPort 1.2 × 2 HDMI	DisplayPort (2 m)
EV2416W  ■ Black ■ Gray	24.1"	1920 × 1200	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
EV2316W  ■ Black ■ Gray	23"	1920 × 1080	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
EV2216W  ■ Black ■ Gray	22"	1680 × 1050	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)

Square

	Size	Native Resolution	Panel Type	Viewing Angle (H/V)	Brightness	Response Time	Input Terminals	Supplied Signal Cables
EV2730Q  ■ Black ■ Gray	26.5"	1920 × 1920	IPS	178°/178°	300 cd/m ²	5 ms	DVI-D 24 pin DisplayPort	Dual link DVI-D (2 m) DisplayPort (2 m)
S2133  ■ Black ■ Gray	21.3"	1600 × 1200	IPS	178°/178°	420 cd/m ²	6 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1934  ■ Black ■ Gray	19"	1280 × 1024	IPS	178°/178°	250 cd/m ²	14 ms	DVI-D 24 pin DisplayPort D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1703  ■ Black ■ Gray	17"	1280 × 1024	TN	170°/160°	250 cd/m ²	5 ms	DVI-D 24 pin D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)
S1503  ■ Black ■ Gray	15"	1024 × 768	TN	160°/160°	400 cd/m ²	8 ms	DVI-D 24 pin D-Sub mini 15 pin	DVI-D (2 m) D-Sub mini 15 pin (1.8 m)

Function and Beauty

Frameless, fully-flat design



Frameless

Bezel of Just 1 mm

With a bezel width of only 1 mm these monitors are virtually frameless. Even with the black borders along the perimeter of the LCD there is very little distance between the display area of each screen in a multi-monitor configuration which makes for almost seamless viewing.

Frame Width and Display Area


EV2785	EV2780	EV2750	EV2456	EV2455*	EV2451	EV2450*
7.4 mm 1 mm bezel and 6.4 mm black border	6.7 mm 1 mm bezel and 5.7 mm black border	6.2 mm 1 mm bezel and 5.2 mm black border	6.2 mm 1 mm bezel and 5.2 mm black border	6.2 mm 1 mm bezel and 5.2 mm black border	5.3 mm 1 mm bezel and 4.3 mm black border	5.3 mm 1 mm bezel and 4.3 mm black border

*EV2455 and EV2450 have the bezel and black border sizes as shown but are 3-sided frameless.

Fully Flat

Minimalist Front Surface Design

EIZO's no-compromises approach to design and functionality ensures the switches on the front of the monitor are easy to operate. Even with the minimalist front bezel, we achieved a flat, frameless design which incorporates an auto brightness sensor along with power and setting control switches by miniaturizing all these components.

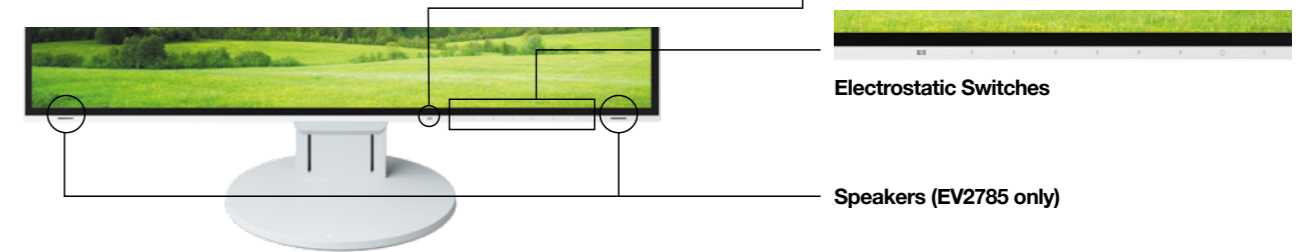


Beautiful from Front to Back

White Cables for a White Cabinet

The aesthetically-pleasing design of the monitor extends to the cables. White cables come bundled with the white cabinet option of the EV2785, EV2780, EV2456, and EV2451.


Cable Management

To keep your desktop tidy, both a cable holder and a cable cover are included with the EV2785, EV2456, and EV2451.

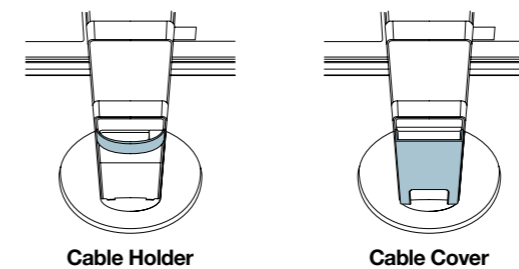

Carrying Handle

A convenient carrying handle makes it easy to set up the monitor straight from the box, and easy to move around.

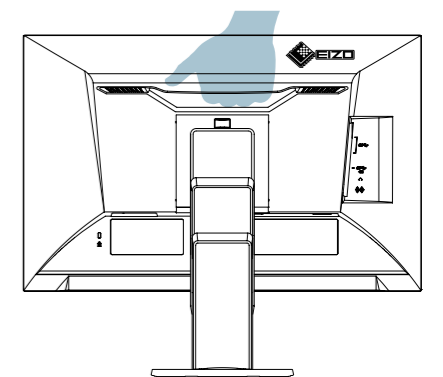





Say Goodbye to Tired Eyes

Blue Light Reduction

Paper Mode

Do you find that your screen is often too bright to read text for long periods of time? FlexScan monitors are equipped with 'Paper Mode' which adjusts your screen to look just like paper, making it less jarring on your eyes. It reduces the amount of blue light being emitted from your monitor, and makes the screen a warm, easy to read color. When used in conjunction with the Auto EcoView function, blue light can be even further reduced.


- ⊖ Brightness
- ⊖ Contrast Ratio
- ⊕ Low Color Temperature

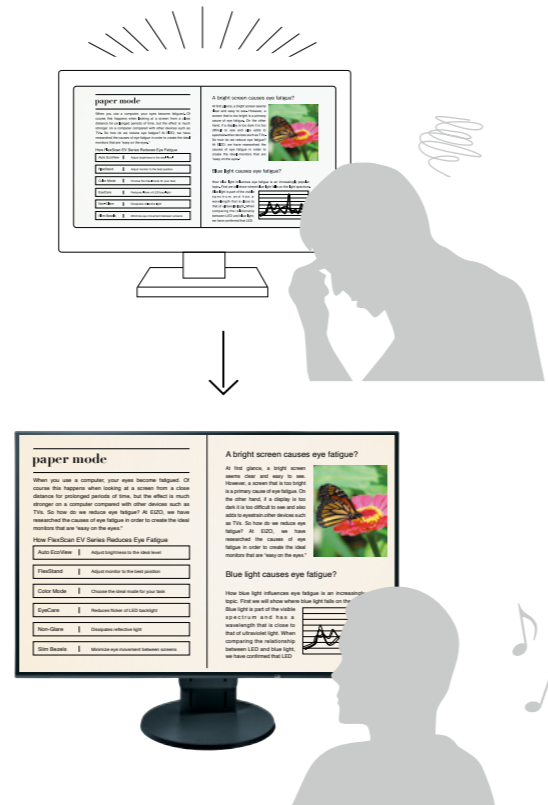

Auto Brightness Control

Always the Ideal Brightness with Auto EcoView

The Auto EcoView function automatically adjusts the brightness of your monitor screen to match the ambient lighting, meaning that your monitor is always at the optimal brightness. This is helpful for reducing eye fatigue as your eyes aren't straining to see the monitor.

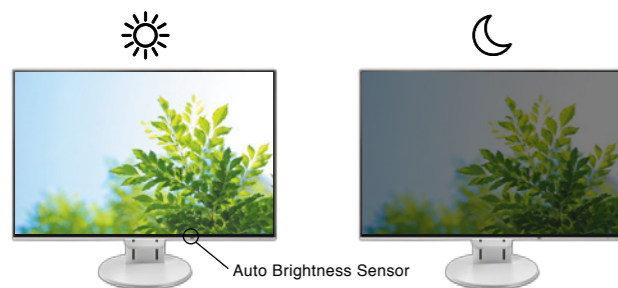

Flicker-Free Viewing

EyeCare Dimming Mode

In low brightness ranges, users may perceive flicker on a typical LED backlight, causing eye fatigue and often headaches. EyeCare is a dimming function that cuts flicker to a degree that human eyes cannot detect, reducing eye fatigue and flicker-related headaches, without affecting color stability of the monitor.

FlexScan monitors are certified by TÜV Rheinland to have low blue light and be flicker-free.



Stable Image Even on a Dark Screen

Reduce Brightness to Less Than 1 cd/m²


Frameless and Wide monitors can be adjusted to a brightness less than 1 cd/m² without affecting the color or stability of the display.



Glare Reduction

Anti-Glare Coating

FlexScan monitors are treated with an anti-glare coating to reduce screen reflections caused by ambient lighting. The coating scatters incoming light, reducing the amount of light reflected into your eyes.

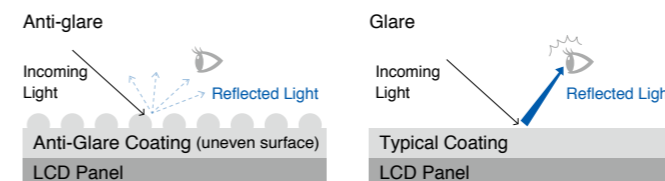

Visit Our Website

"The Latest on Computer Screens and Eye Fatigue"





Intelligent Software to Work Better

SCREEN INSTYLE

With EIZO'S free Screen InStyle software automatically optimize your monitor to make your user environment more comfortable.

Compatible Models	EV3237 / EV2785 / EV2780 / EV2750 / EV2456 / EV2455 / EV2451 / EV2450
Compatible OS	Windows 10(32-bit,64-bit) / 8.1(32-bit,64-bit) / 7 SP1(32-bit,64-bit)



Auto Color Mode

Automatically Change the Color Mode for Each Application

FlexScan monitors have multiple color modes designed for different uses. Use the Auto Color Mode to assign a color mode to turn on when using specific applications such as those for writing documents, photo viewing, creating illustrations or watching movies. When an application is opened the screen will automatically switch to the assigned color mode, making manual switching unnecessary.




Hotkey Assignment

Switch the Input Signal with a Hotkey

When you have two PCs connected to your monitor, switch between them with just your keyboard. Even when using PbyP or PinP, signals can be switched quickly and easily.


See P12 for more details on PbyP and PinP.

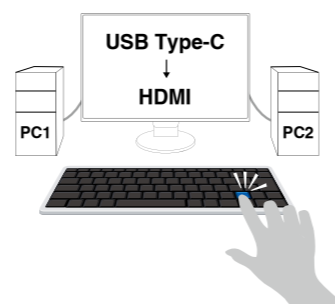

Circadian Dimming

Sleep Better with Automatic Blue Light Control

The Circadian Dimming function automatically changes the color temperature of your monitor as the day progresses. Maintain your body's natural circadian rhythm by setting the monitor to gradually reduce blue light during the evening, helping you sleep easier.

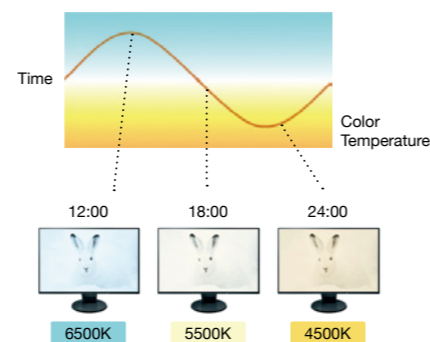

Visit Our Website


"Sleep Tight with Less Blue Light" >>>



Multi-Monitor Convenience


Synchronize Screen Adjustments

When using multiple monitors, save time by synchronizing all the monitors with each other. If you change the color mode, brightness or color temperature of one monitor, the rest will automatically change to the same.

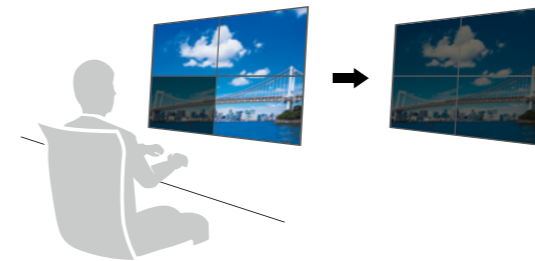

On/Off All at Once

When one monitor's power is turned off, all other monitors will also turn off. Save energy by easily turning off all monitors at once.

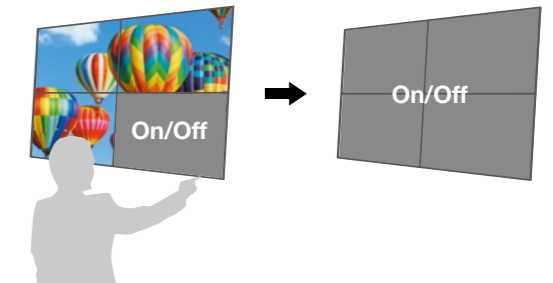


SCREEN INSTYLE SERVER

Effectively Monitor Asset Management

Automatically Receive Monitor or PC Information


With Screen InStyle Server receive information such as the model name and serial number of any monitor connected to your network. Additionally, see information from the computer that each monitor is connected to, such as the OS, IP address and computer name.

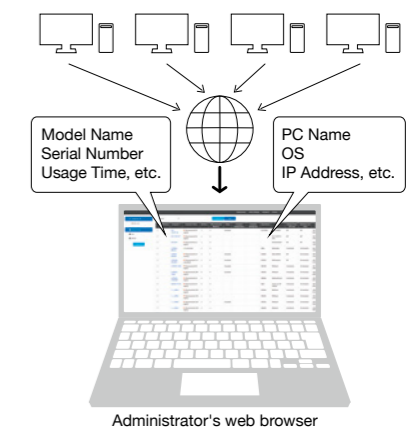

Control Settings on Multiple Monitors at Once


Manage Multiple Monitors from One Location

Control multiple monitors' settings such as color mode, brightness, and eco functions from a remote location. Furthermore, prevent unintended setting changes by locking the operation switch.



Conserve Power with Central Management

Manage various power settings of networked PCs and monitors. Set the monitor to turn off or the PC to sleep after a set period of inactivity.

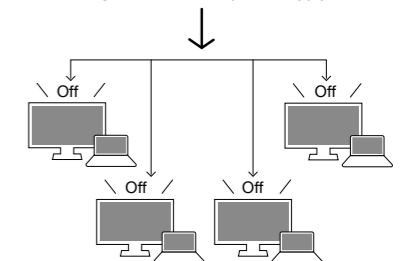

Improve Security with Automatic Locking

Improve office security by setting networked PCs to automatically lock after a certain period of inactivity. This is helpful when users forget to lock their PCs before leaving their desks.

Download Screen InStyle and Screen InStyle Server Free >>>






Work Big, Comfortably

Make the Most of a Big Screen

PbyP Picture by Picture

Display multiple video signals side by side on the same screen.


Compatible Models EV3237 / EV2785 / EV2780 / EV2750

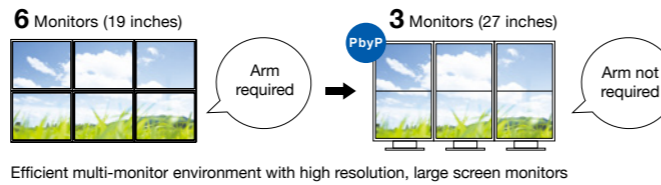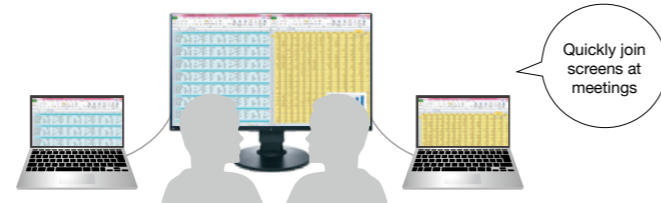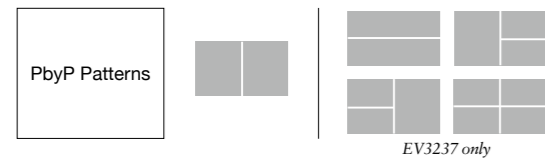

PinP Picture in Picture

Display a secondary input signal in the corner of the screen.

Compatible Models EV3237

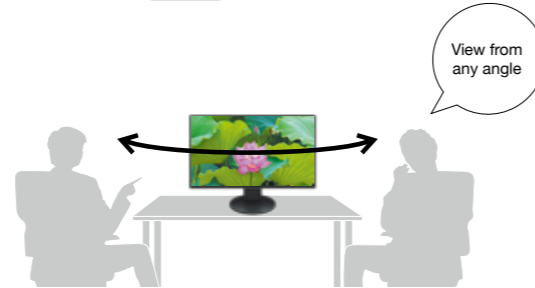

The Beauty of IPS Panels


When viewing images on large screens, colors can appear differently across the screen depending on your viewing angle. EIZO's frameless monitors adopt IPS panels which have wide viewing angles and excellent color reproduction. From below, above or rotated — colors will be displayed clearly at any angle.

One Cable Connection


USB Type-C Compatible

With the EV2785 and EV2780, you can connect a USB Type-C compatible notebook PC with a single cable, transmitting audio and video, and supplying power to the notebook.

※When a power supply exceeding 15 watts is supplied from the EV2780, the monitor brightness is limited to 120 cd/m².

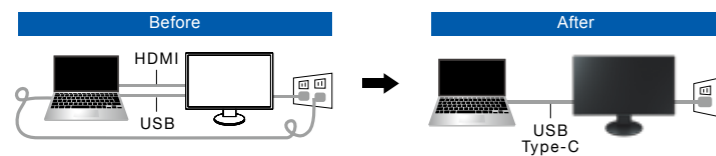

Compatible Models EV2785 / EV2780

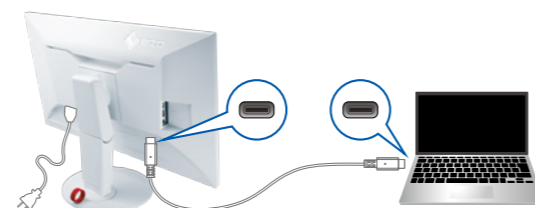

[Visit Our Website](#) |
 [Infographic: "What is USB Type-C?"](#)



The Perfect Position

Versatile Stand

The stands feature height adjustment, tilt and swivel, while saving space and remaining stylish. Quickly and smoothly adjust your monitor to the perfect position.

The specific movement ranges of stands varies by model. Check the specifications on P18 - P21.


For the EV2456

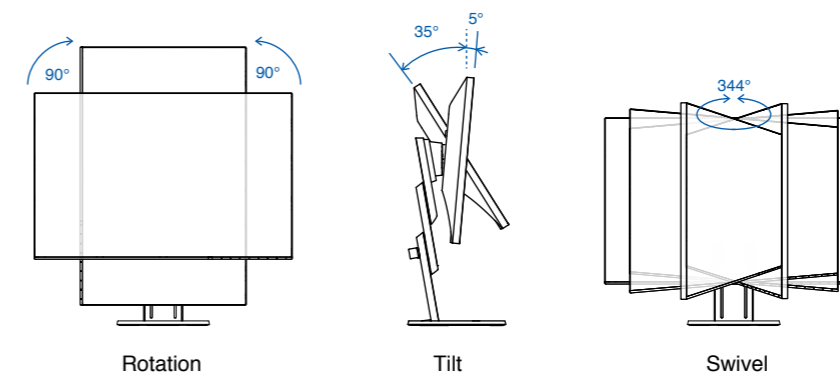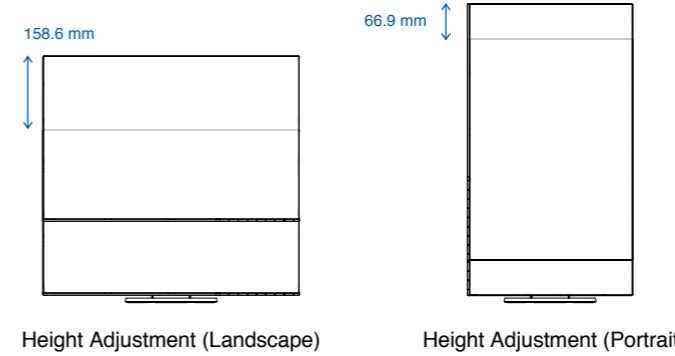

Wide Height Adjustment Range

Position the monitor to a height that allows you to work without tiring.

The S1503 is not height adjustable.

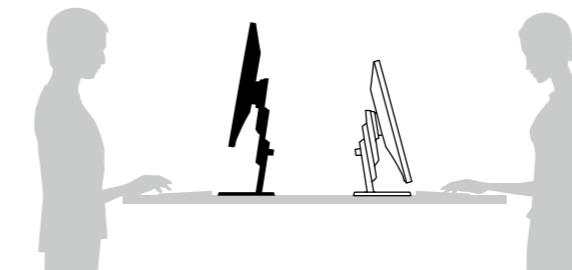

Use in Portrait or Landscape

View web pages and documents more easily by switching the monitor to portrait mode simply by rotating the screen.

EV3237, EV2730Q, S1934, S1703, and S1503 do not support rotation. PC settings are required to change the direction of the display.



Free Up Your Workspace



PCSK-03 Stand Bracket

The PCSK-03 is a VESA-compliant bracket for easily mounting a client terminal such as a thin client or mini PC to the back of the monitor's stand. The space the client terminal previously occupied is now freed up so you can make better use of your desktop. Even with the client terminal attached you can adjust the monitor's stand freely.



Match Accessories from Front to Back

The bracket comes in both white and black to match the color of your monitor cabinet and cables.



Safe to Use with Various Client Terminals

The stand has been tested with several companies' client terminals, even in multi-monitor environments. When installed correctly the bracket does not interfere with the balance of the monitor according to several international standards (IEC 60950, IEC 60601-1), meaning that even a heavy client terminal won't cause your monitor to overbalance.



Visit Our Website

"PCSK-03 Stand Bracket"



Be Eco Friendly — It's a Breeze

Automatically Reduce Power Consumption

Brightness Control with Auto EcoView

Auto EcoView automatically controls the brightness of the monitor to match ambient lighting. No more fiddling with brightness settings throughout the day, simply turn Auto EcoView on and save power while maintaining optimal visibility.

Auto EcoView




Control the Backlight with EcoView Optimizer 2

Save more power with EcoView Optimizer 2, which reduces the brightness of the backlight according to the content being displayed, all while maintaining maximum visibility.

Excludes EV2730Q, S1934, S1703, and S1503.

EcoView Optimizer 2

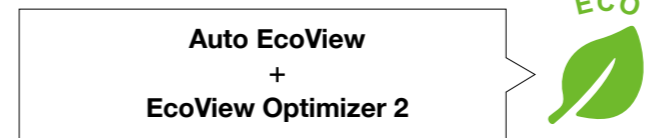

Certified Savings

EIZO's FlexScan monitors are certified for visual ergonomics and energy savings. All Frameless and Wide FlexScan models are TCO Displays 7 and EPA Energy Star certified, with the EV2451 and EV2456 earning the EU Energy Label's maximum rating of A++. All monitors (excluding the S1503) have EPEAT Gold ratings, and all monitors are TÜV Rheinland certified.




Centrally Manage Energy Consumption

SCREEN INSTYLE SERVER

With Screen InStyle Server, centrally control the powering off of all monitors connected to the PC network. Conserve energy without relying on each user to turn monitors off after use.

See P11 for more details

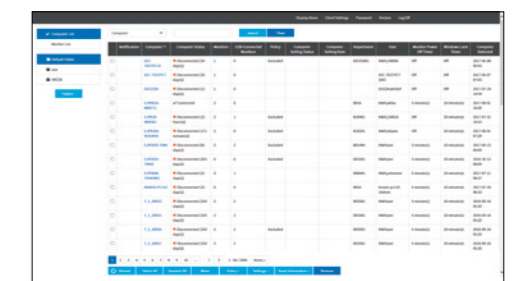

Five-Year & Zero Bright Pixels Warranty

Five-Year Warranty

A 5-year manufacturer's warranty covers all components including the LCD panel to ensure a long service life.



Zero Bright Pixels

EIZO guarantees zero bright sub-pixels for six months from the purchase date.
Applies to Frameless monitors, EV3237 and EV2780Q



Accessories

Wall Mount Arm

The LA-011-W is a single-axis arm with a minimum profile and tilt/swivel.

Supported Monitors: EV3237, EV2785, EV2780, EV2750, EV2730Q, S2133



Dual Height Adjustable Stand

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2133, S1934, S1923, S1703, S1503



Protection Panels

These panels protect against dust and scratches. They come in reversible glossy and non-glare sides.

Supported Monitors: All Wide and Square monitors on pages 19 - 21.



Screen Cleaner Kit

Keep your screen free from dust and fingerprints with this screen cleaner kit. Includes pump spray and cloth.



UTILITY SOFTWARE

Power Management for Enterprises

EIZO EcoView NET helps organizations take advantage of the ergonomic and energy-saving features of EIZO monitors by allowing a network administrator to adjust the brightness and power settings from a central location.

Monitor Control Utility

Screen InStyle is software for managing single or multi-monitor configurations. See pages 10 - 11 for details.

Monitor Control for Systems Administrators

EIZO Monitor Configurator lets administrators control the settings of all FlexScan EV monitors with a USB connection. Settings can be saved as an xml file and applied to other monitors.

Read about some of the organizations that use FlexScan and why



Mizuho Securities

Country: Japan / Product Deployed: FlexScan EV2750

Mizuho Securities replaced their previous desk installation of eight 19-inch square LCD monitors which were positioned on arm mounts, with four 27-inch FlexScan EV2750 monitors. EIZO's highly flexible stand allowed Mizuho Securities to adjust the height and rotate the screens into portrait mode without needing arm mounts. Furthermore, with the EV2750's picture-by-picture function, they were able to secure eight unique display areas on only four screens.



Festo

Country: Germany / Product Deployed: FlexScan EV2450

Festo is a global manufacturer of process control and factory automation technology. They use two FlexScan monitors at each work station in their new 12,000 square meter Automation Center at the Esslingen site in Germany. The narrow bezel makes the monitor look almost frameless in the dual-screen solution. In addition, it has a good price-performance ratio and a five-year guarantee spanning the product's entire service life.



Port of Antwerp

Country: Belgium / Product Deployed: FlexScan EV3237

The port of Antwerp is one of the largest ports in the world, situated on the river Scheldt. The highly complex logistical network of the harbor is laid out on several monitors that visualize high resolution IP cameras, maps, and flowcharts. The multi-functional EV3237 proved to be capable of showing all sorts of images in a very precise way, as well as offering unequalled reliability.



Tobii Pro

Country: Sweden / Product Deployed: FlexScan EV2451

Tobii Pro is the leading provider of research solutions and services designed to deepen understanding of human behavior. They use the FlexScan EV2451 with their eye-tracking solutions to display image and video stimuli that serves as a high-end research tool for both academia and commercial researchers. In addition to high-image quality, the monitor's sleek design is almost non-intrusive for the user.

Frameless




NEW FlexScan EV2785 4K USB Type-C

FlexScan EV2780 USB Type-C FlexScan EV2750 FlexScan EV2456

Model Variations	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color	White, Black	White, Black	White, Black	White, Black
Panel	Type: IPS Backlight: LED Size: 27" / 68.5 cm Native Resolution: 3840 x 2160 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 27" / 68.5 cm Native Resolution: 2560 x 1440 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 27" / 68.5 cm Native Resolution: 2560 x 1440 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 24.1" / 61.1 cm (611 mm diagonal) Native Resolution: 1920 x 1200 (16:10 aspect ratio)
Display Size (H x V)	596.7 x 335.7 mm	596.7 x 335.7 mm	596.7 x 335.7 mm	518.4 x 324.0 mm
Pixel Pitch	0.155 x 0.155 mm	0.233 x 0.233 mm	0.233 x 0.233 mm	0.270 x 0.270 mm
Display Colors	16.77 million	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°	178°, 178°
Brightness (typical)	350 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast Ratio (typical)	1300:1	1000:1	1000:1	1000:1
Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	USB Type-C x 1 (with HDCP 1.2), DisplayPort 1.2 x 1 (with HDCP 1.2), HDMI x 2 (with HDCP)	USB Type-C x 1 (with HDCP), DisplayPort x 1 (with HDCP), HDMI x 1 (with HDCP)	DisplayPort x 1 (with HDCP), DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP)	D-Sub mini 15 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)
Digital (H, V)	USB Type-C: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz HDMI: 31 - 135 kHz, 29 - 31 Hz, 49 - 61 Hz and 69 - 71 Hz	USB Type-C: 31 - 89 kHz, 29 - 31 Hz, 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 29 - 31 Hz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 89 kHz, 29 - 31 Hz and 59 - 61 Hz DisplayPort: 31 - 89 kHz, 59 - 61 Hz HDMI: 31 - 89 kHz, 49 - 61 Hz	DVI: 31 - 76 kHz, 59 - 61 Hz DisplayPort: 31 - 76 kHz, 59 - 61 Hz HDMI: 15 - 76 kHz, 49 - 51 Hz and 59 - 61 Hz
Analog (H, V)	-	-	-	31 - 81 kHz, 55 - 76 Hz
Sync Formats	-	-	-	Separate
USB	Function : 1 port for upstream (USB Type-C) 2-port USB hub (including 1 USB battery charge port) Standard : USB 3.1 Gen 1	Function : 1 port for upstream (USB Type-C) 2-port USB hub Standard : USB 3.1 Gen 1	Function : 1 port for upstream 2-port USB hub Standard : USB 3.0	Function : 1 port for monitor control 2-port USB hub Standard : USB 3.0
Audio	Speakers : 1.0 W +1.0 W Input Terminals : - Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume	Speakers : 1.0 W +1.0 W Input Terminals : - Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)
Power	Power Requirements : AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption : 163 W Typ. Power Consumption : 31 W Power Save Mode : Less than 0.5 W Power Management : Power Save (DMPM, DisplayPort 1.2a)	Power Requirements : AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption : 96 W Typ. Power Consumption : 23 W Power Save Mode : Less than 0.5 W Power Management : Power Save (DMPM, DisplayPort 1.2a)	Power Requirements : AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption : 67 W Typ. Power Consumption : 22 W Power Save Mode : Less than 0.5 W Power Management : Power Save (DMPM, DisplayPort 1.2a), Eco Timer	Power Requirements : AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption : 44 W Typ. Power Consumption : 11 W Power Save Mode : Less than 0.5 W Power Management : Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer
Features & Functions	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : - OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2) Auto EcoView : Yes EcoView Sense : - OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : - OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : - OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Physical Specifications	Dimensions (W x H x D) : 611.4 x 367.3 - 545.2 x 230 mm Dimensions (Without Stand, W x H x D) : 611.4 x 356.3 x 50 mm Net Weight : 8.2 kg / 18.1 lbs Net Weight (Without Stand) : 4.9 kg / 10.8 lbs Height Adjustment Range : 177.9 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D) : 611.6 x 359 x 48.5 mm Net Weight : 8.1 kg Net Weight (Without Stand) : 5.3 kg Height Adjustment Range : 155 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 611.6 x 390.2 - 545.2 x 245 mm Dimensions (Without Stand, W x H x D) : 611.6 x 359 x 48.5 mm Net Weight : 7.9 kg Net Weight (Without Stand) : 5.1 kg Height Adjustment Range : 155 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 531 x 351.4 - 510.1 x 190 mm Dimensions (Without Stand, W x H x D) : 531 x 341.9 x 45.5 mm Net Weight : 5.7 kg Net Weight (Without Stand) : 3.7 kg Height Adjustment Range : 158.6 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm
Certifications & Standards	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, CAN ICES-3 (B), TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories	AC power cord, signal cable (USB Type-C - USB cable cover, Type-C, DisplayPort - DisplayPort, HDMI - HDMI) setup guide	AC power cord, signal cable (USB Type-C - USB cable cover, Type-C, DisplayPort - DisplayPort, setup guide)	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD - ROM (PDF user's manual), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	Yes	Yes	Yes

Dimension Diagrams (Unit:mm)

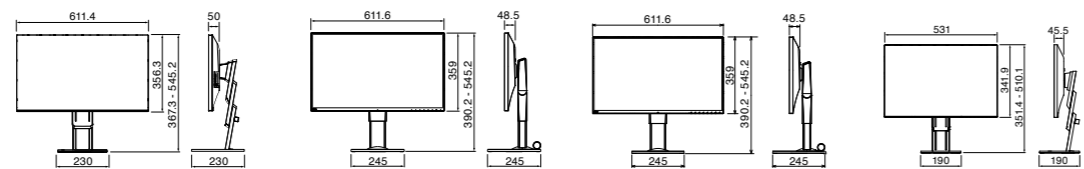

With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase.

Frameless



FlexScan EV2455


FlexScan EV2451

FlexScan EV2450

FlexScan EV3237 4K

Model Variations	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand	With FlexStand, Without Stand
Cabinet Color	White, Gray, Black	White, Black	White, Gray, Black	Gray, Black
Panel	Type: IPS Backlight: LED Size: 24.1" / 61 cm (611 mm diagonal) Native Resolution: 1920 x 1200 (16:10 aspect ratio)	Type: IPS Backlight: LED Size: 23.8" / 60.4 cm (604 mm diagonal) Native Resolution: 1920 x 1080 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 23.8" / 60 cm (604 mm diagonal) Native Resolution: 1920 x 1080 (16:9 aspect ratio)	Type: IPS Backlight: LED Size: 31.5" / 80 cm (799 mm diagonal) Native Resolution: 3840 x 2160 (60Hz, 16:9 aspect ratio) DVI / HDMI: 3840 x 2160 (30Hz, 16:9 aspect ratio)
Display Size (H x V)	518.4 x 324.0 mm	527 x 296.5 mm	527 x 296.5 mm	696.9 x 392.0 mm
Pixel Pitch	0.270 x 0.270 mm	0.275 x 0.275 mm	0.275 x 0.275 mm	0.181 x 0.181 mm
Display Colors	16.77 million	16.77 million	16.77 million	16.77 million
Viewing Angles (H/V, typ.)	178°, 178°	178°, 178°	178°, 178°	178°, 178°
Brightness (typical)	300 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1
Response Time (typical)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)	5 ms (gray-to-gray)
Input Terminals	D-Sub mini 15 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)	DisplayPort 1.2 x 2 (with HDCP 1.x ¹), DVI-D 24 pin x 1 (with HDCP 1.x ¹), HDMI x 1 (with HDCP 1.x ¹)
Digital (H, V)	DVI: 31 - 76 kHz, 59 - 61 Hz DisplayPort: 31 - 76 kHz, 59 - 61 Hz HDMI: 15 - 76 kHz, 49 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 51 Hz and 59 - 61 Hz	DVI: 31 - 68 kHz, 59 - 61 Hz DisplayPort: 31 - 68 kHz, 59 - 61 Hz HDMI: 15 - 68 kHz, 49 - 61 Hz	DVI: 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz
Analog (H, V)	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	-
Sync Formats	Separate	Separate	Separate	Separate
USB	Function : 1 port for monitor control 2-port USB hub Standard : USB 3.0	Function : 1 port for monitor control 2-port USB hub Standard : USB 3.0	Function : 1 port for monitor control 2-port USB hub Standard : USB 3.0	Function : 1 port for upstream 3-port USB hub (including 1 USB Battery charge port) Standard : USB 3.0, USB BC 1.2
Audio	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)	Speakers : 1.0 W +1.0 W Input Terminals : 3.5 mm stereo jack Output Terminals : 3.5 mm headphone jack Sound Adjustment : Volume, Source (DisplayPort, HDMI)
Power	Power Requirements : AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption : 49 W Typ. Power Consumption : 13 W Power Save Mode : Less than 0.3 W Power Management : Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements : AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption : 42 W Typ. Power Consumption : 13 W Power Save Mode : Less than 0.5 W Power Management : Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM)	Power Requirements : AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption : 44 W Typ. Power Consumption : 11 W Power Save Mode : Less than 0.3 W Power Management : Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements : AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption : 105 W Typ. Power Consumption : 30 W Power Save Mode : Less than 0.5 W Power Management : Power Save (DMPM, DisplayPort 1.2a), Eco Timer
Features & Functions	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : Yes OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : - OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : Yes OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes : Color mode (Paper, Movie, sRGB, User1, User2, DICOM) Auto EcoView : Yes EcoView Sense : Yes OSD Languages : English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Physical Specifications	Dimensions (W x H x D) : 530.8 x 368 - 488.2 x 233 mm Dimensions (Without Stand, W x H x D) : 530.8 x 347.2 x 47.9 mm Net Weight : 6.5 kg Net Weight (Without Stand) : 4.1 kg Height Adjustment Range : 131 mm (maximum 140mm) Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 537.7 x 322.7 - 495.4 x 190 mm Dimensions (Without Stand, W x H x D) : 537.7 x 313.1 x 45.5 mm Net Weight : 5.5 kg Net Weight (Without Stand) : 3.5 kg Height Adjustment Range : 172.7 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 537.6 x 368 - 473.5 x 233 mm Dimensions (Without Stand, W x H x D) : 537.6 x 317.6 x 47.9 mm Net Weight : 6.2 kg Net Weight (Without Stand) : 3.8 kg Height Adjustment Range : 140 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : 90° (both clockwise and counter clockwise) Hole Spacing (VESA Std.) : 100 x 100 mm	Dimensions (W x H x D) : 731 x 439 - 578 x 245 mm Dimensions (Without Stand, W x H x D) : 731 x 428 x 59.5 mm Net Weight : 10.6 kg Net Weight (Without Stand) : 7.8 kg Height Adjustment Range : 139 mm Tilt : 35° Up, 5° Down Swivel : 344° Pivot : - Hole Spacing (VESA Std.) : 100 x 100 mm
Certifications & Standards	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cable (DisplayPort - DisplayPort), USB cable, cable cover, CD-ROM (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	Yes	Yes	Yes	Yes


Dimension Diagrams (Unit:mm)

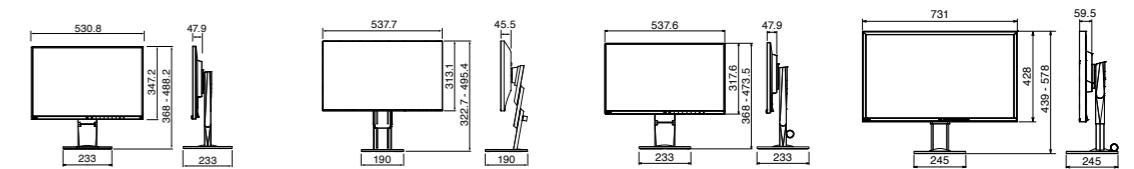




	FlexScan EV2416W	FlexScan EV2316W	FlexScan EV2216W	FlexScan EV2730Q
Model Variations	-	-	-	With FlexStand, Without Stand
Cabinet Color	Gray, Black	Gray, Black	Gray, Black	Gray, Black
Panel	Type: TN Backlight: LED Size: 24.1" / 61 cm (611 mm diagonal) Native Resolution: 1920 x 1200 (16:10 aspect ratio) Display Size (H x V): 518.4 x 324.0 mm Pixel Pitch: 0.270 x 0.270 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 170°, 160° Brightness (typical): 250 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (black-white-black)	Type: TN Backlight: LED Size: 23" / 58 cm (584 mm diagonal) Native Resolution: 1920 x 1080 (16:9 aspect ratio) Display Size (H x V): 509.8 x 286.7 mm Pixel Pitch: 0.265 x 0.265 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 170°, 160° Brightness (typical): 250 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (black-white-black)	Type: TN Backlight: LED Size: 22" / 56 cm (558 mm diagonal) Native Resolution: 1680 x 1050 (16:10 aspect ratio) Display Size (H x V): 473.7 x 296.1 mm Pixel Pitch: 0.282 x 0.282 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 170°, 160° Brightness (typical): 250 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (black-white-black)	Type: IPS Backlight: LED Size: 26.5" / 67 cm (672 mm diagonal) Native Resolution: 1920 x 1920 (1:1 aspect ratio) Display Size (H x V): 475.7 x 475.7 mm Pixel Pitch: 0.248 x 0.248 mm Display Colors: 16.77 million Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 300 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (gray-to-gray)
Video Signals	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP) Digital (H, V): 31 - 76 kHz, 59 - 61 Hz Analog (H, V): 31 - 76 kHz, 55 - 61 Hz Sync Formats: Separate	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP) Digital (H, V): 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68.0 kHz, 59 - 61 Hz Analog (H, V): 31 - 68 kHz, 55 - 61 Hz Sync Formats: Separate	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP) Digital (H, V): 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68.0 kHz, 59 - 61 Hz Analog (H, V): 31 - 68 kHz, 55 - 61 Hz Sync Formats: Separate	Input Terminals: DisplayPort x 1 (with HDCP), DVI-D 24 pin x 1 (with HDCP) Digital (H, V): 31 - 127 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz, Single link: 29 - 31 Hz) Analog (H, V): - Sync Formats: -
USB	Function: 1 port for monitor control, 2-port USB hub Standard: USB 2.0	Function: 1 port for monitor control, 2-port USB hub Standard: USB 2.0	Function: 1 port for monitor control, 2-port USB hub Standard: USB 2.0	Function: 1 port for upstream, 2-port USB hub Standard: USB 2.0
Audio	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume, Power Save, Source (DisplayPort)	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume, Power Save, Source (DisplayPort)	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume, Power Save, Source (DisplayPort)	Speakers: 1.0 W +1.0 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume, Power Save, Source (DisplayPort)
Power	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 45 W Typ. Power Consumption: 15 W Power Save Mode: Less than 0.3 W Power Management: Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 37 W Typ. Power Consumption: 10 W Power Save Mode: Less than 0.3 W Power Management: Power Save (DPM, DMPM, DisplayPort 1.1a), Eco Timer	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 39 W Typ. Power Consumption: 12 W Power Save Mode: Less than 0.3 W Power Management: Power Save (DPM, DMPM, DisplayPort 1.1a), Eco Timer	Power Requirements: AC 100 - 240 V, 50 / 60 Hz Max. Power Consumption: 64 W Typ. Power Consumption: 25 W Power Save Mode: Less than 0.5 W Power Management: Power Save (DMPM, DisplayPort 1.1a), Eco Timer
Features & Functions	Preset Modes: FineContrast (Paper, Movie, sRGB, User1, User2) Auto EcoView: Yes EcoView Sense: Yes OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: FineContrast (Paper, Movie, sRGB, User1, User2) Auto EcoView: Yes EcoView Sense: Yes OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: FineContrast (Paper, Movie, sRGB, User1, User2) Auto EcoView: Yes EcoView Sense: Yes OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Preset Modes: FineContrast (Paper, Movie, sRGB, User1, User2) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Physical Specifications	Dimensions (W x H x D): 552.5 x 368 - 499 x 233 mm Dimensions (Without Stand, W x H x D): 552.5 x 358 x 57 mm Net Weight: 6.1 kg Net Weight (Without Stand): 3.7 kg Height Adjustment Range: 131 mm (maximum 140 mm) Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 540 x 368 - 478.5 x 233 mm Dimensions (Without Stand, W x H x D): 540 x 317.5 x 56 mm Net Weight: 5.9 kg Net Weight (Without Stand): 3.5 kg Height Adjustment Range: 140 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 500 x 368 - 483.1 x 233 mm Dimensions (Without Stand, W x H x D): 500 x 326.5 x 54 mm Net Weight: 5.6 kg Net Weight (Without Stand): 3.3 kg Height Adjustment Range: 140 mm Tilt: 35° Up, 5° Down Swivel: 344° Pivot: 90° Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (W x H x D): 497 x 512.5 - 613.5 x 245 mm Dimensions (Without Stand, W x H x D): 497 x 501.5 x 56 mm Net Weight: 7.1 kg Net Weight (Without Stand): 4.2 kg Height Adjustment Range: 101 mm (maximum 141 mm) Tilt: 35° Up, 5° Down Swivel: 344° Pivot: - Hole Spacing (VESA Std.): 100 x 100 mm
Certifications & Standards (Please contact the EIZO group company or distributor in your country for the latest information.)	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cables (DVI - D - DVI - D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI - D - DVI - D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI - D - DVI - D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI - D - DVI - D [dual link supported]), DisplayPort - DisplayPort, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	-	-	-	Yes

Dimension Diagrams (Unit:mm)

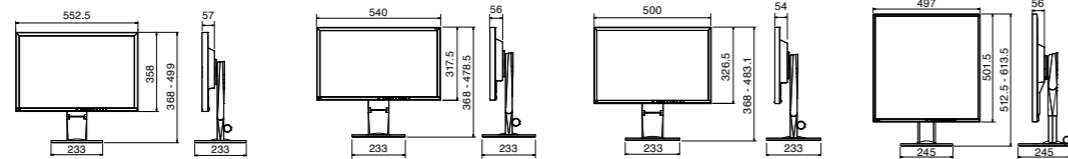


With current LCD technology, a panel may contain a limited number of missing or flickering pixels. If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximize the life of the monitor, we recommend the monitor be turned off periodically. ¹ HDCP 2.2 is not supported. ² 6 months from the date of purchase.

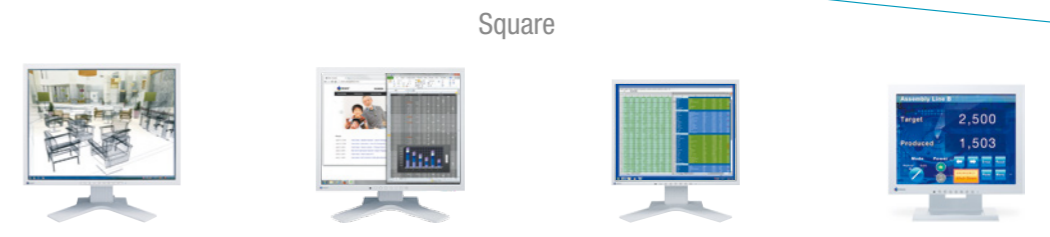

	FlexScan S2133	FlexScan S1934	FlexScan S1703	FlexScan S1503
Model Variations	With Height Adjustable Stand, Without Stand	With Height Adjustable Stand, With Tilt Stand, Without Stand	With Height Adjustable Stand, With Tilt Stand, Without Stand	-
Cabinet Color	Gray, Black	Gray, Black	Gray, Black	Gray, Black
Panel	Type: IPS Backlight: LED Size: 21.3" / 54 cm (540 mm diagonal) Native Resolution: 1600 x 1200 (4:3 aspect ratio) Display Size (H x V): 432 x 324 mm Pixel Pitch: 0.270 x 0.270 mm Display Colors: 16.77 million from a palette of 1.06 billion Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 420 cd/m² Contrast Ratio (typical): 1500:1 Response Time (typical): 6 ms (gray-to-gray)	Type: IPS Backlight: LED Size: 19" / 48 cm (481 mm diagonal) Native Resolution: 1280 x p1024 (5:4 aspect ratio) Display Size (H x V): 374.8 x 299.8 mm Pixel Pitch: 0.293 x 0.293 mm Display Colors: 16.77 million from a palette of 1.06 billion Viewing Angles (H/V, typ.): 178°, 178° Brightness (typical): 250 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 14 ms (gray-to-gray)	Type: TN Backlight: LED Size: 17" / 43 cm (432 mm diagonal) Native Resolution: 1280 x 1024 (5:4 aspect ratio) Display Size (H x V): 337.9 x 270.3 mm Pixel Pitch: 0.264 x 0.264 mm Display Colors: 16.77 million from a palette of 1.06 billion Viewing Angles (H/V, typ.): 170°, 160° Brightness (typical): 250 cd/m² Contrast Ratio (typical): 1000:1 Response Time (typical): 5 ms (black-white-black)	Type: TN Backlight: LED Size: 15" / 38 cm (380 mm diagonal) Native Resolution: 1024 x 768 (4:3 aspect ratio) Display Size (H x V): 304.1 x 228 mm Pixel Pitch: 0.297 x 0.297 mm Display Colors: 16.77 million from a palette of 1.06 billion Viewing Angles (H/V, typ.): 160°, 160° Brightness (typical): 400 cd/m² Contrast Ratio (typical): 600:1 Response Time (typical): 8 ms (black-white-black)
Video Signals	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP) Digital (H, V): 31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) Analog (H, V): 24 - 80 kHz, 49 - 76 Hz Sync Formats: Separate, Composite	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP) Digital (H, V): 31 - 64 kHz, 59 - 61 Hz Analog (H, V): 31 - 64 kHz, 55 - 61 Hz Sync Formats: Separate	Input Terminals: D-Sub mini 15 pin, DVI-D 24 pin (with HDCP) Digital (H, V): 31 - 64 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) Analog (H, V): 31 - 80 kHz, 50 - 75 Hz Sync Formats: Separate, Sync on green	Input Terminals: D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP) Digital (H, V): 31 - 49 Hz, 59 - 61 Hz (VGA Text: 69 - 71 Hz) Analog (H, V): 24.8 - 60.5 kHz, 55 - 75.5 kHz Sync Formats: Separate
USB	Function: 1 port for monitor control, 2-port USB hub Standard: USB 2.0	-	-	-
Audio	Speakers: - Input Terminals: - Output Terminals: - Sound Adjustment: -	Speakers: 0.5 W + 0.5 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume, Source (DisplayPort)	Speakers: 0.5 W + 0.5 W Input Terminals: 3.5 mm stereo jack Output Terminals: 3.5 mm headphone jack Sound Adjustment: Volume	Speakers: 0.5 W + 0.5 W Input Terminals: 3.5 mm stereo jack Output Terminals: - Sound Adjustment: Volume
Power	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 45 W Typ. Power Consumption: 13 W Power Save Mode: Less than 0.3 W Power Management: Power Save (DPM, DMPM, DisplayPort 1.1a), Eco Timer	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 21 W Typ. Power Consumption: 9 W Power Save Mode: Less than 0.5 W Power Management: Power Save (DPM, DMPM, DisplayPort 1.1a), Eco Timer	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 25 W Typ. Power Consumption: 9 W Power Save Mode: Less than 0.5 W Power Management: Power Save (DPM, DMPM), Eco Timer	Power Requirements: AC 100 - 120 V / 200 - 240 V, 50 / 60 Hz Max. Power Consumption: 16 W Typ. Power Consumption: 6 W Power Save Mode: Less than 1 W Power Management: Power Save (DPM, DMPM), Eco Timer
Features & Functions	Preset Modes: FineContrast (Paper, Movie, sRGB, User1, User2) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	Color mode (Paper, sRGB, User1, User2, DICOM) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	FineContrast (Text, sRGB, EyeCare, Paper, Custom) Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish	EyeCare, Text, sRGB, Custom Auto EcoView: Yes EcoView Sense: - OSD Languages: English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish
Physical Specifications	Dimensions (W x H x D): 465 x 453 - 535 x 208.5 mm Dimensions (Without Stand, W x H x D): 465 x 361 x 64 mm Net Weight: 8.6 kg Net Weight (Without Stand): 5.6 kg Height Adjustment Range: 82 mm Tilt: 40° Up, 0° Down Swivel: 35° Right / 35° Left Pivot: 90° Hole Spacing (VESA Std.): 100 x 100 mm	With Height Adjustable Stand: 405 x 406.5 - 506.5 x 205 mm With Tilt Stand: 405 x 414 x 205 mm Dimensions (Without Stand, W x H x D): 405 x 334 x 61.5 mm Net Weight: 5.6 kg Net Weight (Without Stand): 3.8 kg Height Adjustment Range: 100 mm Tilt: With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down Swivel: With Height Adjustable Stand: 35° Right / 35° Left With Tilt Stand: - Pivot: With Height Adjustable Stand: 90° With Tilt Stand: - Hole Spacing (VESA Std.): 100 x 100 mm	With Height Adjustable Stand: 367 x 391.5 - 491.5 x 205 mm With Tilt Stand: 367 x 384 x 188 mm Dimensions (Without Stand, W x H x D): 367 x 304 x 59 mm Net Weight: 5.5 kg Net Weight (Without Stand): 3.6 kg Height Adjustment Range: 100 mm Tilt: With Height Adjustable Stand: 30° Up, 0° Down With Tilt Stand: 30° Up, 5° Down Swivel: With Height Adjustable Stand: 35° Right / 35° Left With Tilt Stand: - Pivot: With Height Adjustable Stand: 90° With Tilt Stand: - Hole Spacing (VESA Std.): 100 x 100 mm	Dimensions (Without Stand, W x H x D): 346 x 349 x 157 mm Net Weight: 4.7 kg Net Weight (Without Stand): 3.4 kg Height Adjustment Range: - Tilt: 30° Up, 0° Down Swivel: - Pivot: - Hole Spacing (VESA Std.): 100 x 100 mm
Certifications & Standards (Please contact the EIZO group company or distributor in your country for the latest information.)	TCO Displays 7, EPEAT Gold (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Certified Displays 7, EPEAT Gold (height adjustable stand version) / Silver (tilt stand version) (US), TUV/Ergonomics, TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	EPEAT Gold (US), TUV/Ergonomics, TUV/GS, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC	TUV/Ergonomics, TUV/GS, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC
Supplied Accessories (May vary by country. Please contact EIZO for details.)	AC power cord, signal cables (DVI - D - DVI - D, D-Sub - D - Sub), USB cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software)	AC power cord, signal cables (D - Sub - D - Sub, DVI - D - DVI - D), audio cable, setup guide, CD - ROM (PDF user's manual)	AC power cord, signal cables (D - Sub - D - Sub, DVI - D - DVI - D), audio cable, setup guide, CD - ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (DVI - D - DVI - D, D-Sub mini 15 pin - D - Sub mini 15 pin), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), setup guide
Warranty	Five Years	Five Years	Five Years	Five Years
Zero Bright Pixels²	-	-	-	-

Dimension Diagrams (Unit:mm)

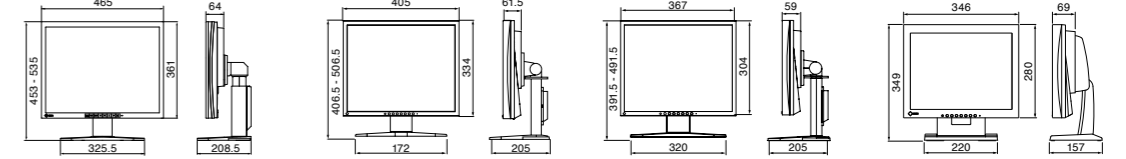

Innovative Technology

Comprehensive Solutions

Visual Technology Company



Business Enterprise



FlexScan
The FlexScan Series of monitors offers a range of features for reducing eye fatigue and improving image clarity for the office, schools, or home use.




Graphics

ColorEdge
ColorEdge is a series of color management monitors and software solutions that provides users in photography, design, post production, and other fields faithful color reproduction, ease-of-use, and reliability for expressing their creative vision.



Customization
We offer extensive customization for select monitors to meet the diverse requirements of various markets, including mission-critical fields such as maritime and air traffic control.

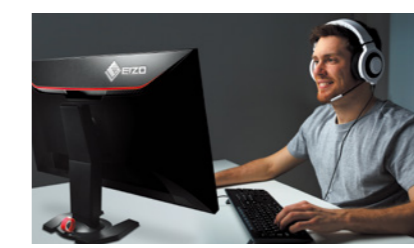

Home Entertainment

FORIS
FORIS, which means "door" in Latin, is EIZO's line of monitors for gaming, watching videos, enjoying digital photos, and more. With unique features such as smartphone notifications, FORIS provides users with an immersive experience.



Healthcare

CuratOR / RadiForce
With CuratOR, EIZO offers complete solutions for the integrated OR, interventional radiology, and the control room. RadiForce medical monitors are designed for displaying medical images faithfully using cutting edge technology and unique features.



Maritime / Security & Surveillance


DuraVision
DuraVision monitors offer robust performance and reliable 24/7 operation to maritime, security and surveillance, and industrial markets. The monitors are highly configurable for flexible installation in a range of environments.



Air Traffic Control

Raptor / Re/Vue
EIZO provides air traffic control centers, towers, and training & simulation facilities with the most extensive lineup of monitors, recording & streaming solutions, and graphics boards in the industry. Extensive customizability is also offered for meeting the needs of any installation.

Video Management Solutions

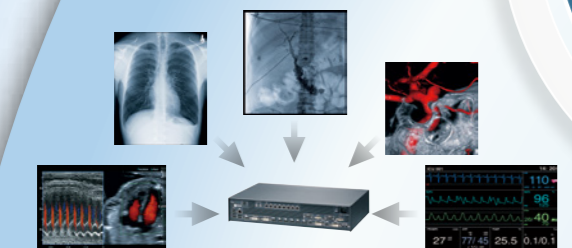


EIZO's Large Monitor Managers gather various video inputs and display them on a large screen. Different layouts can be arranged according to user preference and work environment for a streamlined workflow.

Visibility-Enhancing Technology



EIZO's Visibility Optimizer technology includes three functions for improving image clarity in security environments. Defog enhances images that appear hazy due to fog or snow. Low-Light Correction detects areas of the screen that are too dark and adjusts the brightness of each pixel. Outline Enhancer ensures noise is not accentuated while correcting blurred areas.

IP Decoding Monitors

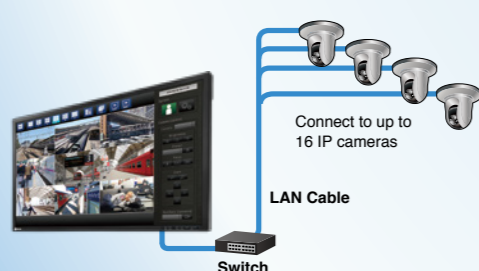

EIZO's IP solutions offer PC-less connection to multiple IP cameras for efficient video management in security and surveillance environments.

45+ years of expertise

45+ years of expertise
With over 45 years of technical expertise, EIZO is dedicated to developing innovative and high quality visual display solutions.



Integrated Production

To incorporate the latest technologies in our products, we follow a unique in-house research and development production model, including the production of our own printed circuit boards (PCBs).




Manufacturing

Our in-house manufacturing combines manual and automated operations to ensure high quality products are made as efficiently as possible.



In-House Optical Bonding

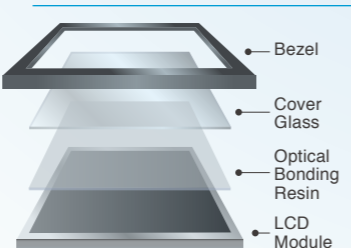

EIZO has an in-house production line for optical bonding which allows the company to continue to meet the needs of professionals while ensuring each product maintains high quality standards.

EIZO Corporation

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6792 Fax:+81-76-277-6793

www.eizoglobal.com

All product names are trademarks or registered trademarks of their respective companies.
EIZO, the EIZO logo, ScreenManager Pro, RadiForce, RadiCS, RadiNET, CuratOR, FlexScan,
ColorEdge, DuraVision, FORIS and Raptor are registered trademarks of EIZO Corporation.
EIZO EcoView Net, Screen InStyle, and Re/Vue are trademarks of EIZO Corporation.
Specifications are subject to change without notice.

Copyright © 2017 EIZO Corporation. All rights reserved.
Printed in Japan, 9, 2017, 4K (170904)



WORK BETTER